





15KW-3P IP66 -PV24000

3-PHASE HYBRID INVERTER

FEATURES:

-  **PV Oversizing**
Support up to 200% oversizing ratio
-  **Unbalanced Output**
Support 150% three-phase unbalanced output to improve flexibility of power distribution
-  **High-Power Density**
A compact size for flexible installation and reduced transportation cost
-  **Overload Capacity**
Peak power able to reach 2 times the rated power for 10s in off-grid mode
-  **Parallel Connection**
Support parallel connection up to 9 units
-  **Efficient Battery Charge / Discharge**
Max. battery charge/discharge current of up to 290A
-  **Touch Screen**
4.3" 800 x 480 interactive display without physical keys
-  **Flexible Connection**
 - GEN port for generator input
 - Dual AC outputs for smart load management
 - AC coupling function

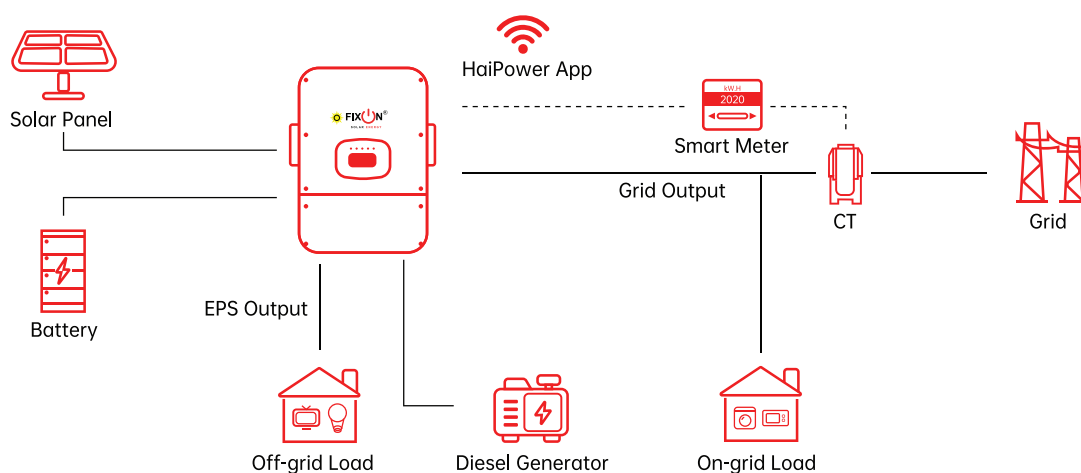

SPECIFICATION:

Model: FXN- 15KW -FLX15-3P		DC Injection Current	<0.5%In
Recommended Max. PV Array Size (Wp)	30000	Switch time (ms) (Typ)	4
Max PV Input Power (W)	24000	Efficiency	
Max. Input Voltage (V)	800	Max. Efficiency	97.60%
Start up Voltage (V)	160	European Efficiency	97.0%
Rated Input Voltage (V)	550	MPPT Efficiency	>99.9%
MPPT Operating Voltage Range (V)	160~650	Protection	
MPPT Voltage Range (full load) (V)	400~650	PV Reverse Polarity Protection	yes
Max Input Current per MPPT (A)	27+20	Anti-Islanding Protection	yes
Max Short Circuit Current per MPPT (A)	40+30	Output Short Protection	yes
Number of MPPTs	2	Ground Fault Monitoring	yes
Number of Strings per MPPT	2+1	Insulation Resistance Monitoring	yes
Max Inverter Backfeed Current to The Array (A)	0	Over-current Protection	yes
Battery Data		Over-temperature Protection	yes
Battery Type	Lead-acid or Lithium-ion	AC / DC Surge Protection	Optional
Rated Battery Voltage (V)	48	AFCI Protection	yes
Battery Voltage Range (V)	40~60	DC Switch	yes
Max. Charge / Discharge Current (A)	290	Residual Current Monitoring	yes
Max. Charge / Discharge Power (W)	15000 / 15000	Grid Monitoring	TYPE II (DC), TYPE II (AC)
Battery Communication	Self-adaption to BMS	General Data	
Number of Battery Input	2 (in parallel)	Dimension (W*H*D) (mm)	450 x 660 x 240 (Excluding connectors and brackets)
AC Input / Output Data (Grid, Load & Generator)		Weight (kg)	39
Nominal AC Input / Output Active Power(W)	15000	Relative Humidity	0~100%
Max. AC Input / Output Apparent Power	16500	Operating Temperature Range (°C)	-40 to +60, >45 Derating
Peak Apparent Power (off-grid)	2 times of rated power, 10s	Storage Temperature (°C)	-45 to +85
Nominal AC Input / Output Current (A)	22.8 / 21.8 / 20.9	Noise Emission (dB)	<55
Max. AC Input/Output Current (A)	25	Altitude (m)	3000
Max. Continuous AC Passthrough	34.1	Cooling Method	Intelling Air Cooling
Max. Output Fault Current (A)	50	Ingress Protection	IP66
Max. Output Over Current Protection (A)	50	Over Voltage Category	OVC II(DC), OVC III(AC)
Rated Input / Output Voltage (V)	220 / 380, 230 / 400, 240 / 415	Topology	Non-Isolated
Input / Output Voltage Range (V)	0.85Un-1.1Un	Protective Class	I
Grid Connection Form	3L+N+PE	Communication Interface	RS485 / CAN / Bluetooth / WIFI, LAN / 4G / GPRS (optional)
Rated Grid Freauency / Range (Hz)	50/45-55, 60/55-65	Display	LCD & APP
Power Factor	~1(0.8 leading to 0.8 lagging)	PV Connector	MC4 compatible connector
THDi (nominal power)	<3%	Battery Connector	Connector

SCAN ME

